Product data sheet Characteristics

9050JCK13V14

Timing Relay, Type JCK, plug In, on delay, adjustable time, 0.6 to 60 seconds, 10A, 240 VAC, 24 VAC/DC

Product availability: Stock - Normally stocked in distribution facility

SQUARE D



Price*: 78.00 USD



Main

Product range	9050JCK	
Product type	Timer	
Timing mode	On-delay	
Timing range	0.660 s	
Supply voltage	24 V AC/DC	

Complementary

Complementary		
Power consumption	2 VA	
Current rating	10 A	
Switch function	DPDT	
Contact composition	2 NO + 2 NC	
Contact material	Silver nickel	
Maximum switching voltage	240 V AC	
Mounting type	Socket	
Number of pins	8	
Shape of pins	Tubular	
For use with	8501NR52 8501NR51	

Environment

LIMITORINGIA	
Certifications	UL Recognized UL Listed CE

^{*} Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Ambient temperature range - operational	-18150 °F (-2866 °C)		
Height	2.40 in (61 mm)		
Width	1.69 in (43 mm)		
Depth	4.09 in (104 mm)		

Ordering and shipping details

Category	21651 - 9050 JCK(NOT JCK60, 70) G P TIMERS			
Discount Schedule	CP2			
GTIN	00785901032700			
Nbr. of units in pkg.	1			
Package weight(Lbs)	0.27 lb(US) (0.12 kg)			
Returnability	Yes			
Country of origin	US			

Packing Units

Package 1 Height	1.90 in (4.826 cm)
Package 1 width	2.60 in (6.604 cm)
Package 1 Length	4.30 in (10.922 cm)


Offer Sustainability

Sustainable offer status	Green Premium product			
REACh Regulation	REACh Declaration			
REACh free of SVHC	Yes			
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration			
Toxic heavy metal free	Yes			
Mercury free	Yes			
RoHS exemption information	Yes			
China RoHS Regulation	China RoHS declaration			
Environmental Disclosure	Product Environmental Profile			
Circularity Profile	End of Life Information			

Contractual warranty


	,				
Warranty		18 months			

Dimensions

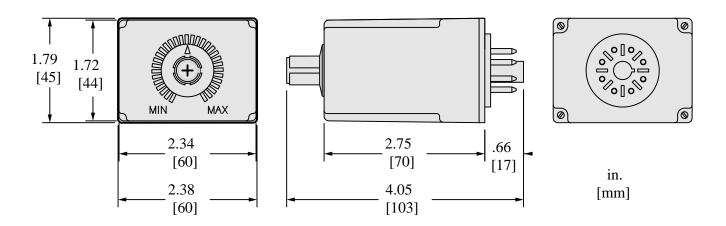

All dimensions are approximate. Also see technical documentation.

Wiring Diagram

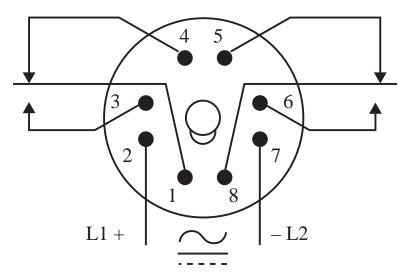

Control Power

JCK 11 – JCK 19

JCK31 – JCK39

JCK51 – JCK59

JCK60