

## Pneumatic Room Thermostat REstat Kit Installation Instructions

### APPLICATION

This kit contains hardware to facilitate field replacement of pneumatic thermostats.

### THIS KIT CONTAINS:

Quantity	Description
One (1)	TK-1001 or TK-1101 with °F setpoint dial and °F thermometer
	OR
One (1)	TK-1001-116 or TK-1101-116 with °C setpoint dial and °C thermometer
<b>To Convert Thermostat Cover Appearance</b>	
One (1)	Blank cover insert
One (1)	Cover insert with setpoint cutout
<b>To Connect Thermostat Tubing to Field Tubing</b>	
Two (2)	1/4" x 5/32" barbed fittings to connect 5/32" thermostat tubing to field tubing
Two (2)	5/32" x 5/32" barbed fittings to connect 5/32" thermostat tubing to field tubing
Two (2)	1/4" O.D. x 2" Tygon tubing to connect 5/32" thermostat tubing to field tubing
Two (2)	1/4" x 1/4" compression to tubing fittings
<b>To Secure Cover to Base</b>	
One (1)	5/64" Allen head screw for securing cover to thermostat base
One (1)	5/64" Allen head wrench

**Note:** Not all hardware is required in each installation.

### Inspection

Visually inspect the carton for damage, if damaged, notify the appropriate carrier immediately. If undamaged, open the carton and visually inspect the device for obvious physical defects. Return damaged or defective products.


### Required Installation Items

- Tools (not provided):
  - Appropriate screwdriver for mounting screws
  - Needle nose pliers for knurled dial removal
- Appropriate accessories
- Mounting screws and appropriate fittings

### INSTALLATION

#### Caution:

- Installer must be a qualified, experienced technician.
- Make all connections in accordance with the instructions on the accompanying General Instruction sheet.

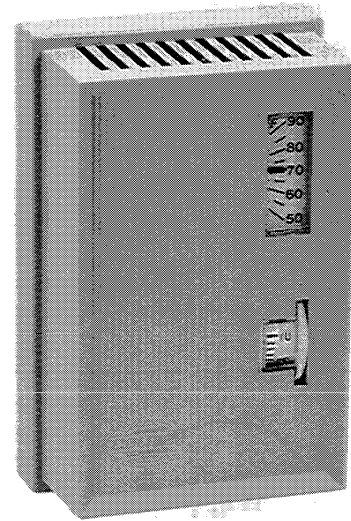

TK-1001 or TK-1101 °F shown

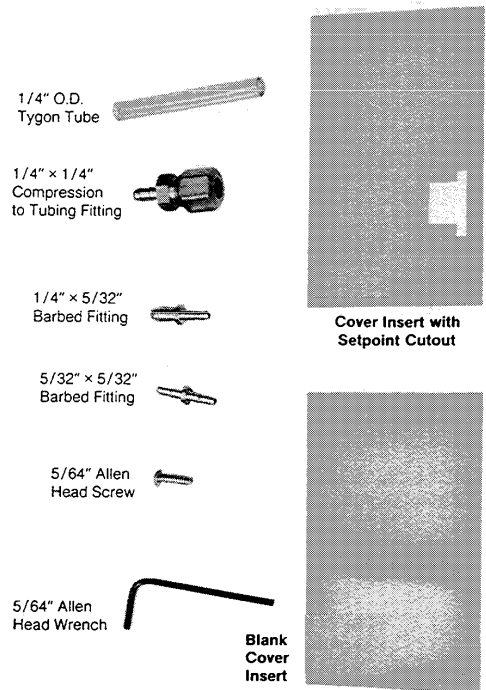


Figure-1 Part Identification.

1. Remove old thermostat and wall plate as necessary to obtain access to Main and Branch lines.
2. Select appropriate hardware to facilitate field connections. Schneider Electric AT-536 accessory kit may be used to improve appearance.
3. Refer to TK-1001/TK-1101 General Instruction sheet (F-15571), included in package, for thermostat mounting and connections.

## OPTIONS

### Tamper Resistant Cover

Replace slotted cover screw with Allen screw. (5/64" Allen wrench included to facilitate Allen screw insertion.)

### Concealed Setpoint

#### Knurled Dial Removal (See Figure 2)

1. Remove thermostat cover.
2. Secure the setpoint dial with hand so that the dial will not rotate.
3. Place needle nose pliers at knurled ring of the setpoint dial at the points where the knurled ring is attached to the setpoint dial.
4. Twist the pliers at each knurled ring attachment point until the entire knurled ring of the setpoint dial is removed.

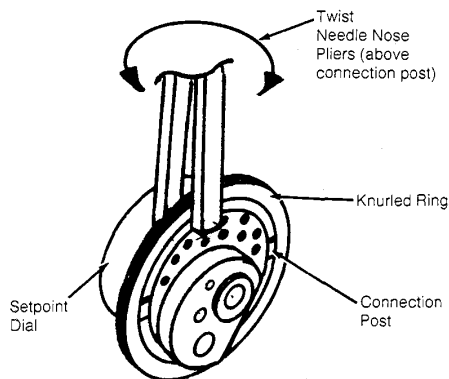


Figure-2 Knurled Dial Removal.

### Limit Setpoint Dial Range

#### Dial Stop Pin Insertion - Included with Mounting Plate (See Figure 3)

1. Remove thermostat cover.
2. Secure the setpoint dial with hand so that the dial will not rotate.
3. Place a dial stop pin in the jaws of a needle nose pliers.

4. Insert the dial stop pin in the appropriate hole on either (or both) side(s) of the setpoint dial to restrict dial rotation.

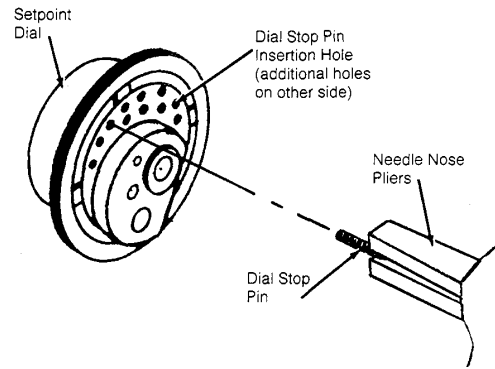


Figure-3 Dial Stop Pin Insertion.

### Cover Insert Installation (See Figure 4)

1. Select appropriate cover insert.

*Note:* If blank insert is used, the knurled ring must be removed from the setpoint dial. See Knurled Dial Removal above. Also, remove dial window by sliding and/or pressing from front of cover.

2. Remove protective backing and protective skin on face of cover insert.
3. Press insert uniformly on thermostat with Schneider Electric logo in lower left-hand corner.

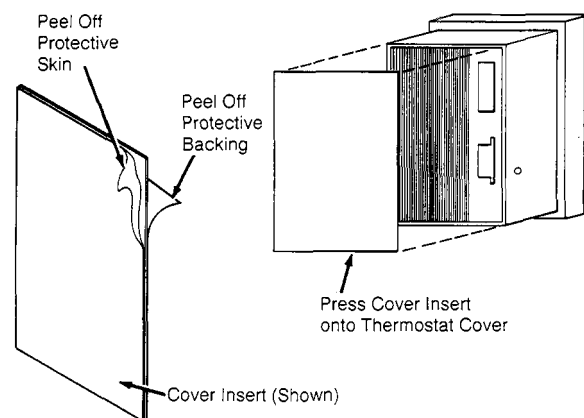


Figure-4 Cover Insert Installation.

On October 1st, 2009, TAC became the Buildings business of its parent company Schneider Electric. This document reflects the visual identity of Schneider Electric, however there remains references to TAC as a corporate brand in the body copy. As each document is updated, the body copy will be changed to reflect appropriate corporate brand changes.

Copyright 2010, Schneider Electric  
All brand names, trademarks and registered trademarks are the property of their respective owners. Information contained within this document is subject to change without notice.

**Schneider Electric**  
1354 Clifford Avenue  
P.O. Box 2940  
Loves Park, IL 61132-2940

[www.schneider-electric.com/buildings](http://www.schneider-electric.com/buildings)

**Schneider**  
**Electric**