



# PANEL FABRICATION

## ABB DIN RAIL SWITCH & FUSE HOLDERS


**M4/6SNBT, M4/8SF, M10/16SFL**

### DESCRIPTION

**Model M4/8SF, M4/8SFL, and M10/16SFL** fuse holders provide a safe method for protecting or isolating a circuit. Once installed, the fuse is enclosed and prohibits the installer from coming in contact with a live circuit. The fuse can be disengaged by pulling up on the fuseholder. Optional blown fuse indicators are available. **Model M4/6SNT** is a non-fusible disconnect switch that provides a safe method for isolating a circuit.

### FEATURES

- **Wire secured by ribbed compression clamp**
- **Universal DIN rail mounting**
- **Unique disconnect design**

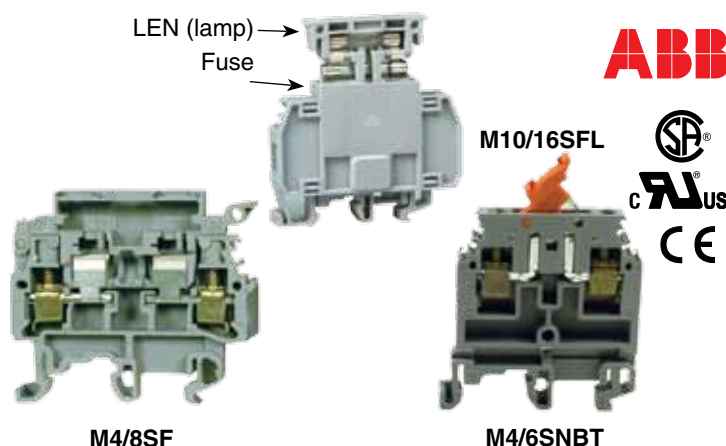


### SPECIFICATIONS

<b>Rated Voltage</b>	600 VAC/VDC
<b>Rated Current</b>	10A UL (6.3A IEC)
<b>Rated Wire Size</b>	
M4/6:	22-10 AWG
M4/8:	22-12 AWG
M10/16:	24-8 AWG
<b>Fuse Size</b>	

<b>M10/16SFL:</b>	
<b>GF Series</b>	0.25" x 1.25" (0.63 x 3.17 cm)
<b>M4/8:</b>	
<b>K235 Series</b>	0.197" x 0.787" (0.5 x 2.0 cm)
<b>Approvals</b>	UL-recognized component, File #E60645; CSA certified; CE
<b>Warranty</b>	1 year

### DIMENSIONS

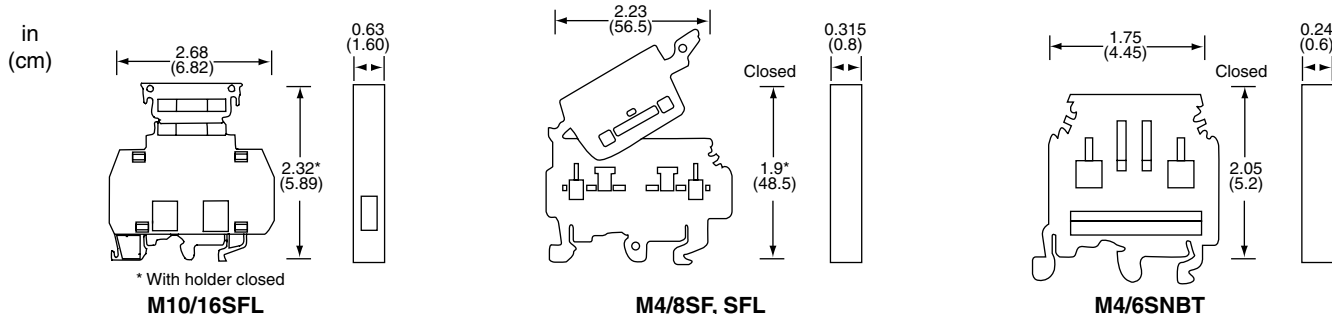

### ORDERING INFORMATION

**MODEL**  
**SWITCH**  
M4/6SNBT1  
FEM62  
**M4/8 FUSEHOLDER**  
M4/8SF  
M4/8SFL  
FEM8S  
K235-amp)  
**M10/16SFL FUSEHOLDER**  
M10/16SFL  
LEN  
GF-(amp)

### DESCRIPTION

6 mm blade switch block (with test sockets). gray/orange handle  
End section for M4/6SNBT  
  
8 mm fuseholder (K235 fuse not included)  
8 mm fuseholder with neon lamp (K235 fuse not included)  
8 mm fuseholder end section  
Fast acting fuses for 8 mm fuse holder (10A fuse maximum)  
  
16 mm fuseholder (GF fuse not included)  
Fuse indicator lamp (110-220 VAC only)  
Fast acting fuse

### RELATED PRODUCTS

DINRALU  
DINRSTL  
BAM2  
M4/6  
  
DIN rail, aluminum  
DIN rail, steel  
End stop  
DIN rail terminal block 6 mm