



# ALARMS & INDICATION

## OPERATOR STATIONS ESB SERIES

### DESCRIPTION

The **E-Stop ESB Series operator stations** offer a highly visible method to shut down equipment, initiate alarms, or give a controller input during emergency conditions. Operation occurs with the breaking of a lens, and then pushing the red push-button inside. Both break-lens to release button and field replacement lens are available.

### FEATURES

- **Highly visible yellow/black background**
- **UL listed for Category NKCR, File #E352651**
- **Various NEMA rated enclosures**
- **Red push-button operators**
- **1 N.O. and 1 N.C. contact included**
- **No power needed to operate**



ESB-M1F-BLR-BS



ESB-M3S-BLP-CS



### SPECIFICATIONS

#### Contact Rating

ES-NO	10A, 600 VAC
ES-NC	2.5A, 600 VDC

#### Contact Configuration

Standard Contacts	1 N.O. and 1 N.C. (Included)
Added Contacts	4 Maintained Total or 6 Momentary Total

#### Mechanical Life

Contact 10 million operations

#### Contact Type

Self-cleaning silver contacts

#### Contact Resistance

<25 milli-Ohms, Closed

#### Operating Temperature

-13° to 158°F (-25° to 70°C)

#### Enclosure Rating

NEMA 1, 3R, 4, 4X, 12, 13

#### Dimensions

M1S, M2S, M3S	4"H X 4" W X 4"D (10.2 X 10.2 X 10.2 CM)
---------------	---

#### M4S

5.91"H X 5.91"D X 4.72"D  
(15 X 15 X 12 CM)

#### M1F

5.5"H X 5.5"W X 4"D  
(14 X 14 X 10.2 CM)

#### Weight

##### M1S

2.63 lb (1.19 Kg)

##### M2S, M1F

2.55 lb (1.16 Kg)

##### M3S

2.83 lb (1.28 Kg)

##### M4S

3.95 lb (1.79 Kg)


#### Approvals

UL Listed file # E352651,  
NKCR, cUL

#### Warranty

1 year

### WIRING

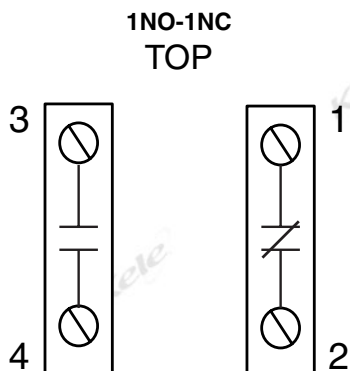

**Note:** Standard contact arrangement is 1 N.O. and 1 N.C.  
(4 momentary or 6 maintained total maximum)