



H5xx Series



Maximize Reliability
Minimize Installed Cost

SPECIFICATIONS

Sensor Power	Induced from monitored conductor
Frequency Range	50/60 Hz
Humidity Range	10 to 90% RH non-condensing
Temperature Range	-15 to 50 °C (5 to 122 °F)
Terminal Block Wire Size	24 to 14 AWG (0.2 to 2.1 mm ²)
Terminal Block Torque	3.5 to 4.4 in-lbs (0.4 to 0.5 N-m)
Agency Approvals	UL 508 closed type device listing, CAT III, pollution degree 2, basic insulation
Limited Warranty	5 years

RELAY CONTACT RATINGS

SPDT (NS) Models

Resistive	15 A @ 277 Vac
Motor	1 HP @ 120 Vac
	2.15 HP @ 277 Vac

SPST (HOA) Models

Resistive	15 A @ 250 Vac
Motor	1 HP @ 120 Vac

TYPICAL COIL PERFORMANCE

Voltage	AC	DC
24 V	36 mA	36 mA

COMBINATION SWITCHING RELAY, CURRENT STATUS SWITCH*, AND HOA SWITCH*

DESCRIPTION

The **Hawkeye 5xx Series** combines an industrial grade load-switching relay, current status switch*, and Hand-Off-Auto (HOA) switch* in an easy-to-install remote enclosure, making the series ideal for monitoring, directly controlling, and troubleshooting the control wiring of fractional horsepower motors. The relay, current sensor*, and HOA switch* are combined in a series circuit. Once an H5xx is wired in series between the power source and motor, all three components are installed. The housing provides physical separation and multiple wiring exits to isolate control and high voltage wiring. An H5xx can be mounted directly on 2- or 4-gang junction boxes, nipped to a field enclosure, or stand alone.

APPLICATIONS

- Monitoring status and controlling small motor loads that are not driven by a motor starter or contactor
- Exhaust fans
- Unit ventilators
- Fan terminal units
- Fan coil units
- Recirculating pumps

FEATURES


- Remote mounted current status sensor* and command relay with or without HOA switch
- Combines status sensor*, command relay, and HOA switch in a single series circuit...one line connection for three devices
- Remote mounted enclosure removes the need to cram multiple devices into a junction box
- HOA provides true relay control...ideal for troubleshooting control wiring
- SPST relay is field-selectable for N.O. or N.C. operation
- All models rated up to 1 HP @ 120 Vac, NS Versions 1HP @ 120 Vac and 1.5 HP @ 277 Vac... one product for all fractional HP motor control and status applications
- Mounts directly on gang boxes, flush to existing enclosures or stand alone...maximum installation flexibility
- 5-year warranty

*Some models




DIMENSIONAL DRAWING

H500

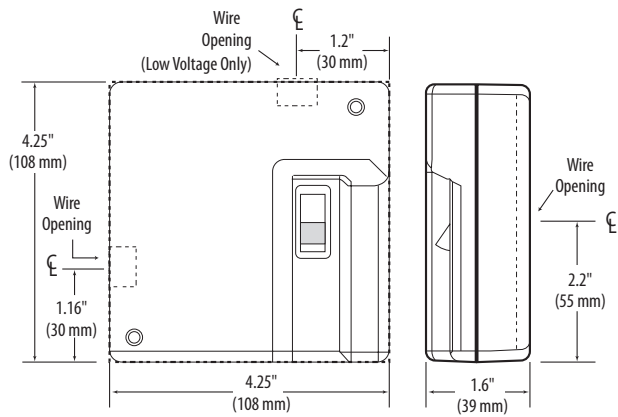


WIRING DIAGRAM

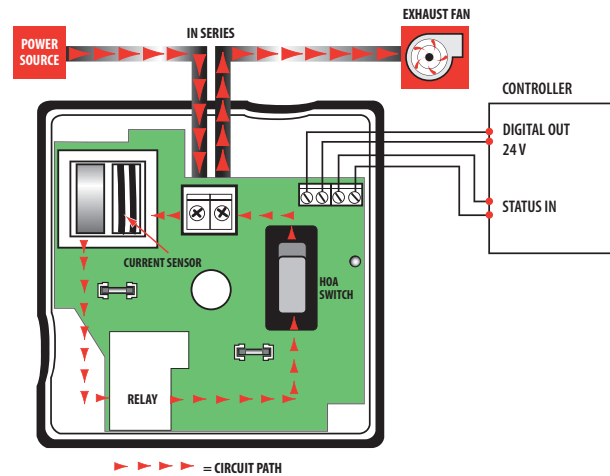


MOUNTING OPTIONS


Mounts directly on 4-gang junction box

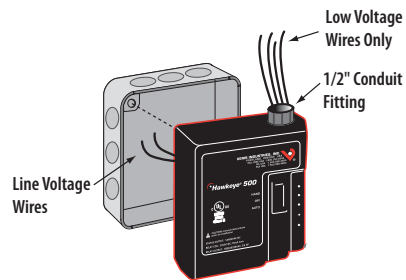


Mounts directly on wall or panel



Mounts directly on 2-gang junction box

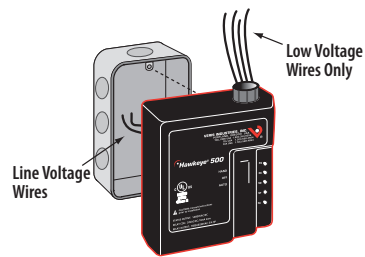

Enclosure Mount



ORDERING INFORMATION



MODEL	AMPERAGE RANGE	STATUS OUTPUT	TRIP POINT	RELAY	RELAY COIL	HOA SWITCH	STATUS LEDS	RELAY POWER LED	UL
H535	0.25 to 15A	Relay Only		SPST, Field-Selectable N.O./N.C.	24 Vac/dc	●		●	●
H535NS	0.25 to 15 A	Relay Only		SPDT				●	●
H540	0.25 to 15 A	N. O., 1.0 A @ 30 Vac/dc	0.25 A or Less, Fixed	SPST, Field-Selectable N.O./N.C.		●		●	●
H540NS	0.25 to 15 A	N. O., 1.0A @ 30 Vac/dc	0.25 A or Less, Fixed	SPDT				●	●
H548	0.5 to 15 A	N. O., 1.0A @ 30 Vac/dc	0.5 A or Less, Adjustable	SPST, Field-Selectable N.O./N.C.		●	●	●	●
H548NS	0.5 to 15 A	N. O., 1.0 A @ 30 Vac/dc	0.5 A or Less, Adjustable	SPDT			●	●	●

ACCESSORIES

Ground bonding kit (AH10)